




ALL SUBGRADES

NOTES:

1. TRENCH BACKFILL SHALL BE PLACED SUCH THAT SETTLEMENT OF PAVED AREAS DOES NOT OCCUR.
2. BACKFILL IN ROADS, STREETS OR RIGHTS-OF-WAY SHALL BE IN ACCORDANCE WITH APPLICABLE CITY, COUNTY OR STATE STANDARDS.
3. COMPACTION TESTING SHALL BE THE RESPONSIBILITY OF THE DEVELOPER AND THE CONTRACTOR.
4. BACKFILL IN OFF-ROAD AREAS SHALL BE IN ACCORDANCE WITH THE OFF ROAD SEWER LINE TRENCH DETAIL.
5. ATTACH TRACER WIRE TO TOP OF PIPE AT MAXIMUM 5' SPACING WITH DUCT TAPE OR ZIP TIES.
6. BEDDING AND INITIAL BACKFILL SHALL BE IN ACCORDANCE WITH SBWRD SPEC. BOOK SECTION 408.1 ($\frac{3}{4}$ " MINUS FOR PIPE DIAMETERS 4" AND LARGER, $\frac{1}{2}$ " MINUS FOR PIPE DIAMETERS LESS THAN 4").

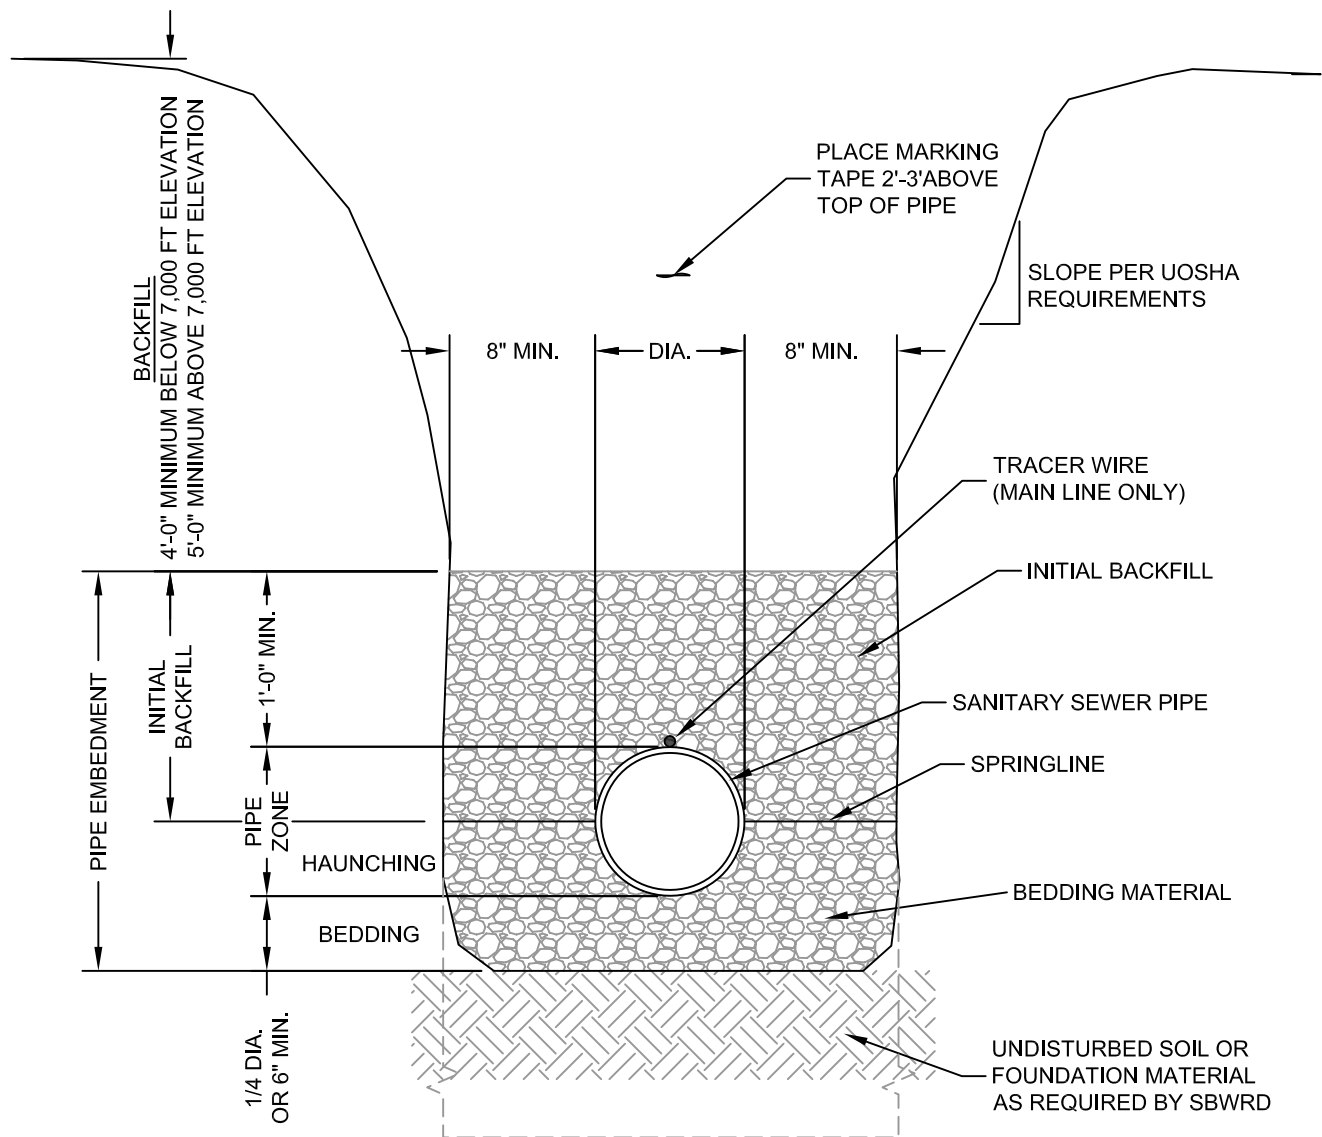

**Snyder Basin Water
Reclamation District**

PIPE TRENCH

STANDARD DETAIL

PI-01

Revision Date: 2/23/26