

INSTALL FRAME AND COVER IN PAVED AREAS.
(D&L SUPPLY H-8030 OR APPROVED EQUAL)

CONCRETE OR
ASPHALT PAVEMENT

INSTALL 10" DIAMETER OR LARGER
SPRINKLER IRRIGATION
BOX IN UNPAVED AREAS


4" TO 6"

THREADED BRASS OR CAST
IRON CAP IN CAST IRON BODY
OR CAST IRON BLIND CAP.

FLEXIBLE TYPE NEOPRENE COUPLING
AS MANUFACTURED BY FERNCO OR
APPROVED EQUAL OR NO-HUB TYPE
CONNECTOR

NOTE: A PVC THREAD ADAPTER MAY
BE USED IN PLACE OF THE CAST IRON
BODY AND NEOPRENE COUPLING
WHEN CLEANOUT IS LOCATED IN A
CAST IRON FRAME AND COVER.

CLEANOUT CAP ASSEMBLY WITH PROTECTIVE BOX

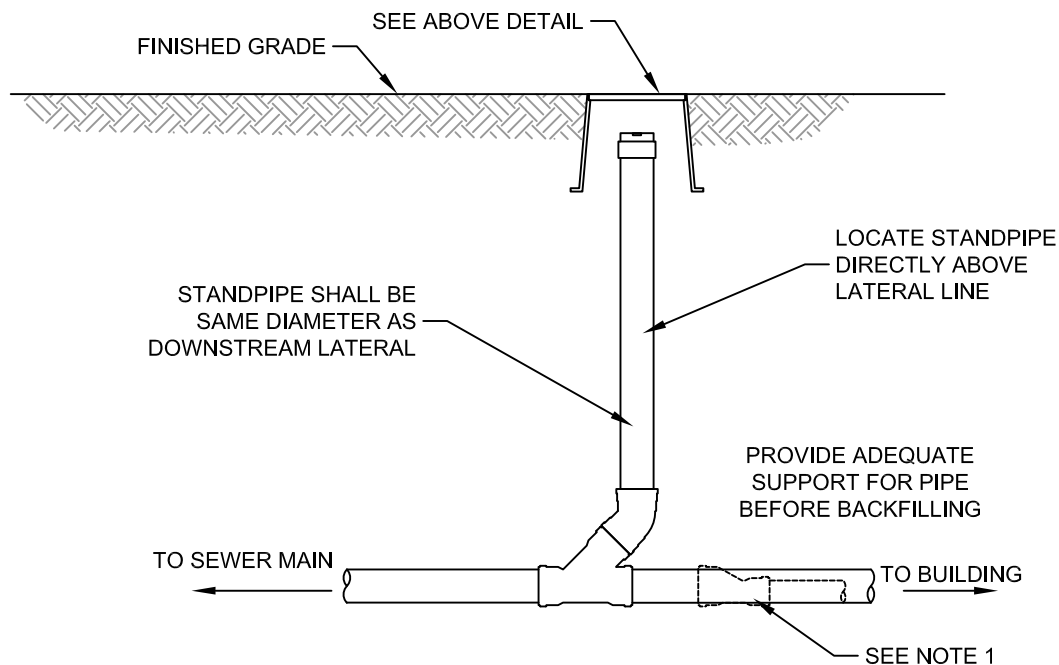

SANITARY SEWER CLEANOUT

NOTES:

1. FOR TRANSITION FROM 4" (UPSTREAM) TO 6" (DOWNSTREAM) LATERALS, TRANSITION SHALL OCCUR AT A CLEANOUT AND SHALL BE ACCOMPLISHED WITH AN ECCENTRIC REDUCER ON THE UPSTREAM SIDE OF THE WYE.
2. FOR LATERALS USING HDPE PIPE:
 - 45° BEND SHALL BE 3 SEGMENT HDPE BEND
 - WYE SHALL BE PREFABRICATED (NOT MOLDED) WYE
 - ALL JOINTS SHALL BE FUSION WELDED



**Snyder Basin Water
Reclamation District**

**SANITARY SEWER CLEANOUT
AND PROTECTIVE BOX**

STANDARD DETAIL

LAT-07

Revision Date: 2/23/26